

KR9330

User Manual

File Version: V21.4.22




KR9330 using the standard USB, easy access to PLC, DCS and other instruments or systems for monitoring soil temperature, soil Moisture state quantities. The internal use of high-precision sensing core and related devices to ensure high reliability and excellent long-term stability, can be customized

RS232,RS485,CAN,4-20mA,DC0~5V\10V,ZIGBEE,Lora,WIFI,GPRS and other output methods.

Technical Parameters

Technical parameter	Parameter value
Brand	KLHA
Moisture Temperature range	-30℃~80℃
Moisture Temperature accuracy	±0.5℃ @25℃
Moisture measuring range	0~100%
Moisture measuring accuracy	±3% @25℃
Communication Interface	USB
Default baud rate	9600 8 n 1
Power	DC3.3~4.2V
Storage	512000bits
Running temperature	-40~80℃
Working humidity	5%RH~90%RH

Product Size

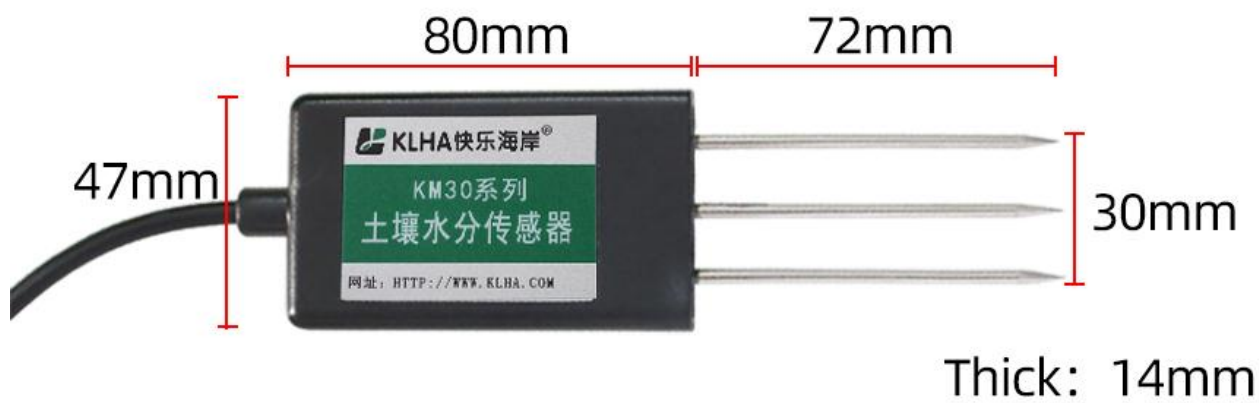

Application solution

KEY POSITION & SCREEN DISPLAY DESCRIPTION



ON:Power button

OFF:Shutdown button

LIGHT:Backlight key

FUN:Measuring point type selection key


PAGE:Measuring point type configuration key

REC:Start/pause recording & type switch

Current time & battery



- ① Record start/pause & record times display
Press the "REC" key and the pause icon on the left side turns into a circular icon and starts recording
Press the "REC" key again to turn the circular icon on the left side into a pause icon and stop recording
- ② Record time interval display (unit: s)
The display setting needs to be connected to the computer through a USB cable for setting

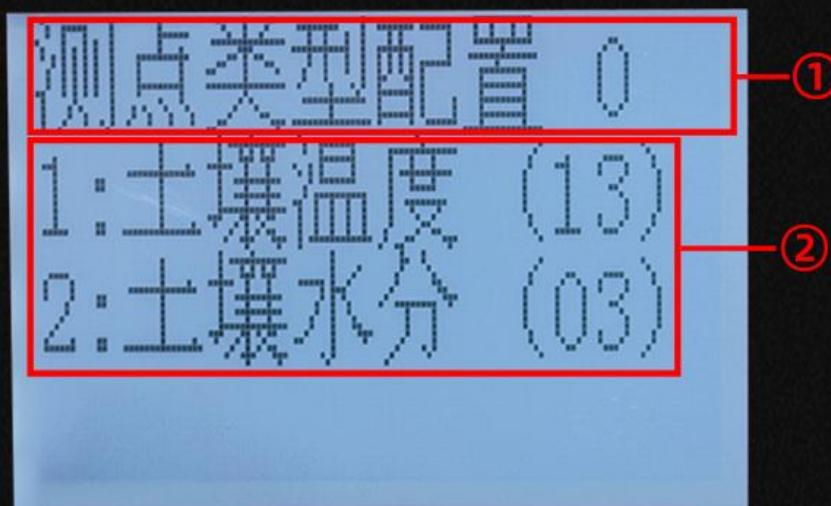

- ① Measuring point type configuration
(need to press "PAGE" to enter the setting)

When pressing the "FUN" key, the number on the measuring point type configuration can be switched back and forth between "1" and "2", the initial value is 0

- ② Measuring point selection

When using the "FUN" key to select the measuring point that needs to be changed, press the "REC" key to change the measuring point type

(※The measuring point has been adjusted to the corresponding configuration at the time of purchase, no need to modify)

Measurement methods



► Rapid measurement

Choose a suitable measurement location, avoid rocks, cut the surface soil according to the depth required for measurement, maintain the original tightness of the underlying soil, hold the sensor vertically and insert it into the soil, do not shake left and right when inserting, to ensure close contact with the soil



► Buried measurement method

Dig a pit with a diameter of about 20cm vertically, and insert the sensor needle into the pit horizontally according to the measurement needs, and fill the pit to ensure close contact with the soil. After the sensor is stable for a period of time, continuous long-term measurement and recording can be performed

How to use?



Disclaimer

This document provides all information about the product, does not grant any license to intellectual property, does not express or imply, and prohibits any other means of granting any intellectual property rights, such as the statement of sales terms and conditions of this product, other issues. No liability is assumed. Furthermore, our company makes no warranties, express or implied, regarding the sale and use of this product, including the suitability for the specific use of the product, the marketability or the infringement liability for any patent, copyright or other intellectual property rights, etc. Product specifications and product descriptions may be modified at any time without notice.

Contact Us

Company: Shanghai Sonbest Industrial Co., Ltd KLHA Brand Division

Address: Building 8, No. 215 North east road, Baoshan District, Shanghai, China

Web: <http://www.klha.com>

Web: <http://www.klha.com>

SKYPE: soobuu

Email: sale@sonbest.com

Tel: 86-021-51083595 / 66862055 / 66862075 / 66861077