


YM8209

TTL to RS485 module

User Manual

File Version: V22.10.5

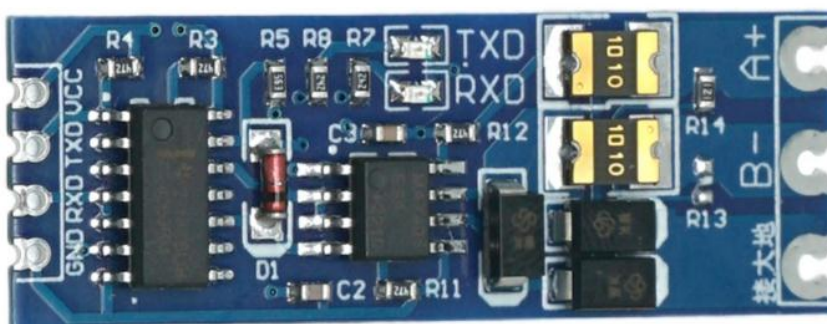


YM8209 using the standard ,easy access to PLC , DCS and other instruments or systems for

monitoring RS485 state quantities. The internal use of high-precision sensing core and related devices to ensure high reliability and excellent long-term stability, can be customized RS232, RS485, CAN, 4-20mA, DC0~5V\10V, ZIGBEE, Lora, WIFI, GPRS and other output methods.

Technical Parameters

Technical parameter	Parameter value
RS485	A+ B-
Communication Interface	TTL
Default baud rate	9600 8 n 1
Power	DC3~5.5V
Running temperature	-30~85℃
Working humidity	5%RH~90%RH


Product Size

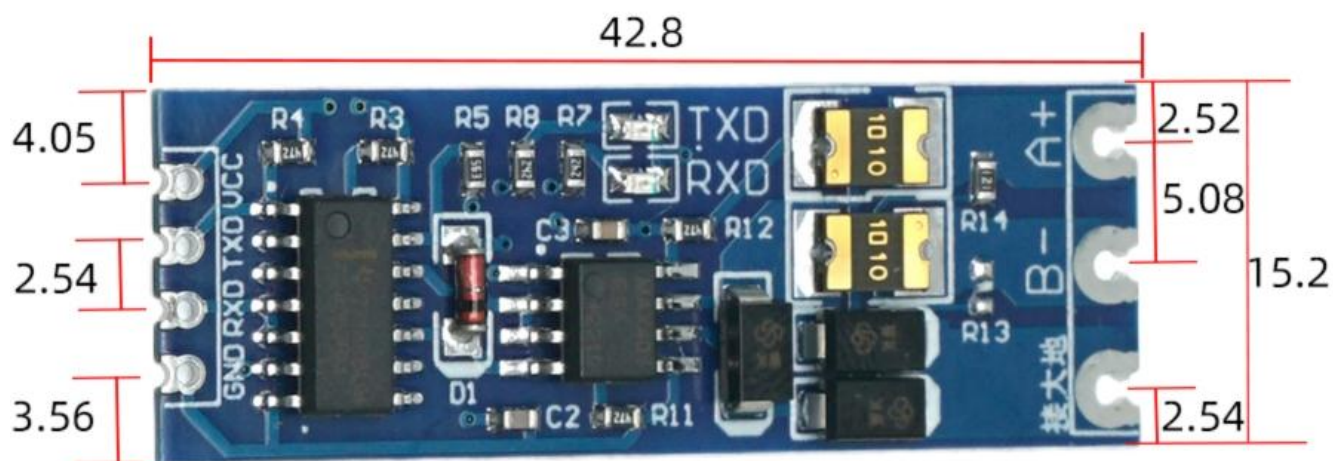


PCB: 0.8mm

UNIT: mm

How to wiring?

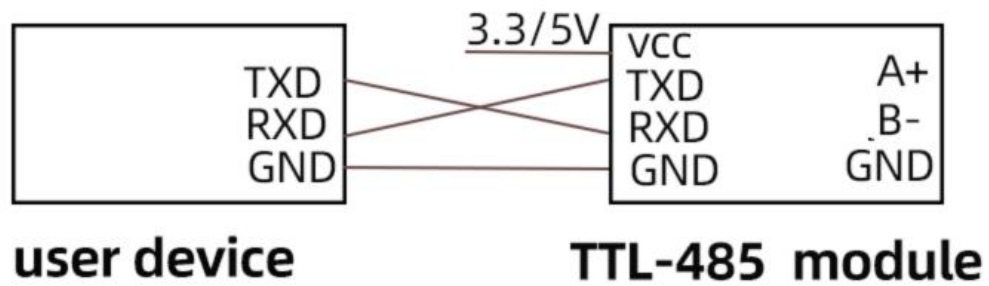

Product List

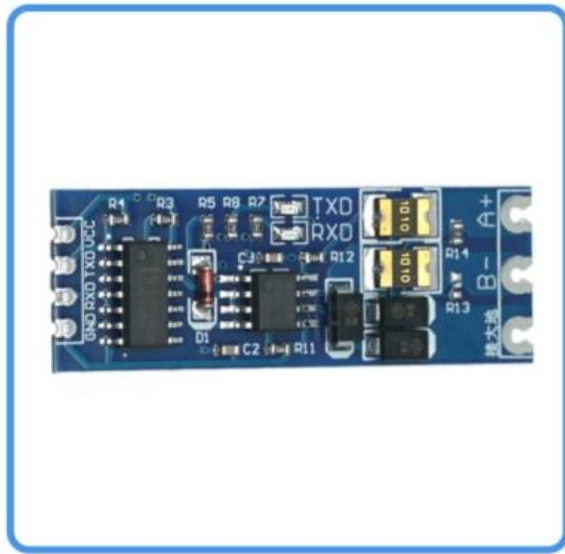

PDF electronic
file manual

TTL-RS485 conversion module

Disclaimer

This document provides all information about the product, does not grant any license to intellectual property, does not express or imply, and prohibits any other means of granting any intellectual property rights, such as the statement of sales terms and conditions of this product, other issues. No liability is assumed. Furthermore, our company makes no warranties, express or implied, regarding the sale and use of this product, including the suitability for the specific use of the product, the marketability or the infringement liability for any patent, copyright or other intellectual property rights, etc. Product specifications and product descriptions may be modified at any time without notice.

Contact Us

Company: Shanghai Sonbest Industrial Co., Ltd INTOIOT Brand Division

Address: Building 8, No. 215 North east road, Baoshan District, Shanghai, China

Web: <http://www.intoiot.cn>

Web: <http://www.intoiot.com>

SKYPE: soobuu

Email: sale@sonbest.com

Tel: 86-021-51083595 / 66862055 / 66862075 / 66861077