

SC7232B

RS485 interface LED displays soil moisture temperature controller

User Manual

File Version: V23.7.30




Soil moisture temperature controller, also known as soil temperature and humidity controller, soil temperature and humidity controller, is mainly composed of two parts: controller instrument, soil moisture sensor. The controller has high reliability and stability, It meets the needs of users in many aspects. The

product has the characteristics of simple operation, high precision, low cost, etc. It can be widely used in various soil temperature control places. To facilitate real-time monitoring of equipment operation and control status, the device has designed RS485 communication interface, which is convenient for users. It is connected with computer or network. Due to the widely used MODBUS-RTU communication protocol, the product is easy to integrate into PLC, man-machine interface, configuration software and other equipment or systems. Users can realize control parameters and data according to communication protocol. Query or set. The product is suitable for scientific experiments, water-saving irrigation, greenhouses, flowers and vegetables, grassland pastures, soil rapid measurement, plant cultivation, sewage treatment and measurement and control of various water content of particulate matter.

Technical Parameters

Technical parameter	Parameter value
Brand	SONBEST
Moisture measuring range	0~100%
Moisture measuring accuracy	±3% @25℃
Moisture Temperature range	-30℃~80℃
Moisture Temperature accuracy	±0.5℃ @25℃
Communication Interface	RS485
Default baud rate	9600 8 n 1
Power	AC185~265V 1A
Dimensions	77mm×77mm×110mm
Running temperature	-30~85℃
Working humidity	5%RH~90%RH

Product Size

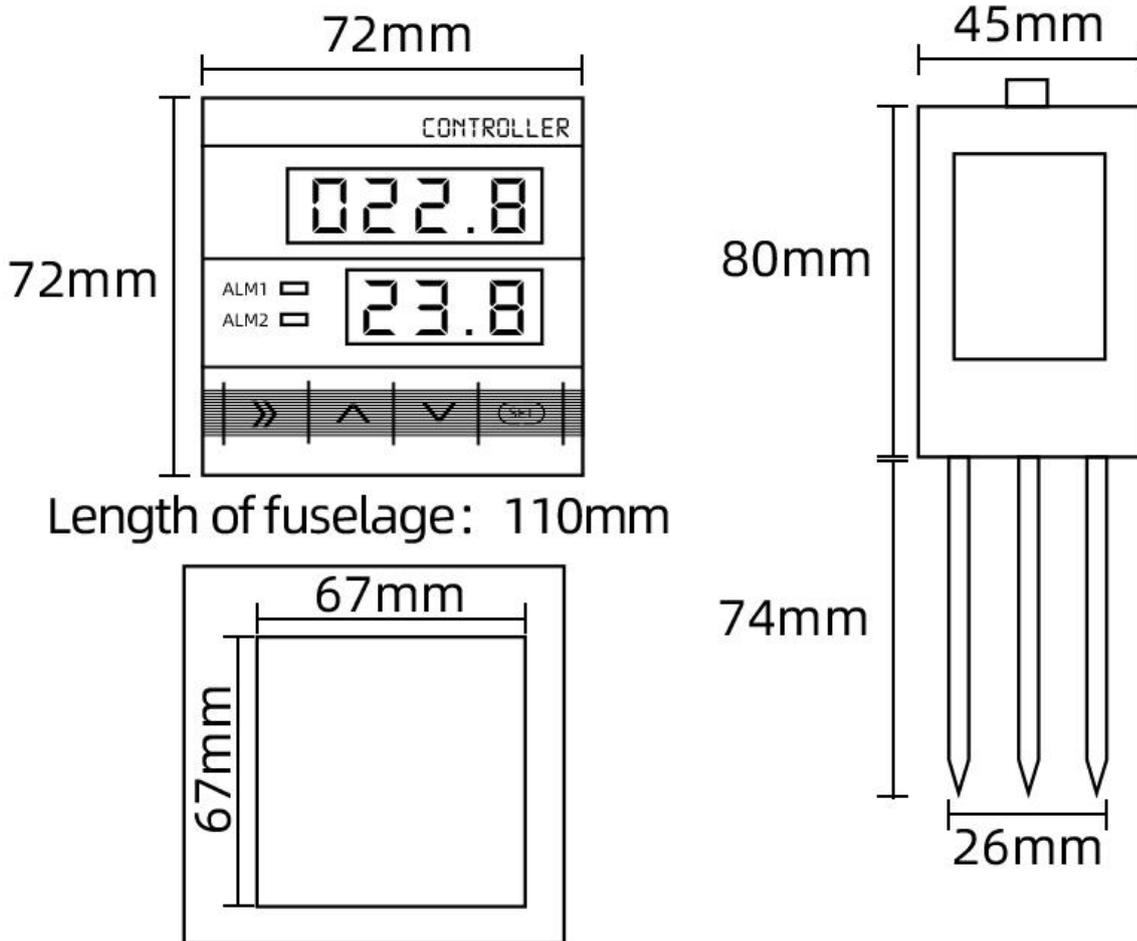

Key instructions

STANDARD MODBUS-RTU PROTOCOL, THE DEFAULT BAUD RATE OF 9600, INVALID, 8-BIT DATA BITS, SOFTWARE CAN CHANGE THE THRESHOLD AND OTHER PARAMETERS, THROUGH RS485 REAL-TIME QUERY TEMPERATURE DATA



➤ : Use the select key when setting

⤴ : Up Key

⤵ : Key down

SET : Set the key

Page 4 sets the alarm

Mode 1: Over-limit Alarm

Mode 2: under-limit alarm

mode 3: over/under-limit action

※Moisture and humidity above the display value, below the temperature display value


Key operation

◆ Press SET to enter upper limit threshold SET by " " select position, press " " " " " " adjust numerical value mode 1,3, when the value is greater than the upper limit threshold relay 1,2 action upper limit threshold: moisture minimum value 0, maximum value 100.0 temperature minimum value -99, maximum value 99.9

◆ Press SET twice to enter the lower limit threshold SET by " " to select the position, press " " " " " " adjust the numerical value mode 2,3, when the value is less than the lower limit threshold relay 1,2 action lower limit threshold: moisture minimum value 0, maximum value 100.0 temperature minimum value -99, maximum value 99.9

◆ Press SET three times to enter the control return setting, press " " to select the position, press " " " " " " to adjust the value return difference: minimum moisture 0, maximum 5.0 minimum temperature 0, maximum 5.0

◆ Press four sets to enter the control mode, press " " to select the position, press " " " " to adjust the numerical value mode 1, above the upper threshold action mode 2, below the lower threshold action mode 3, above the upper threshold action/below the lower threshold action

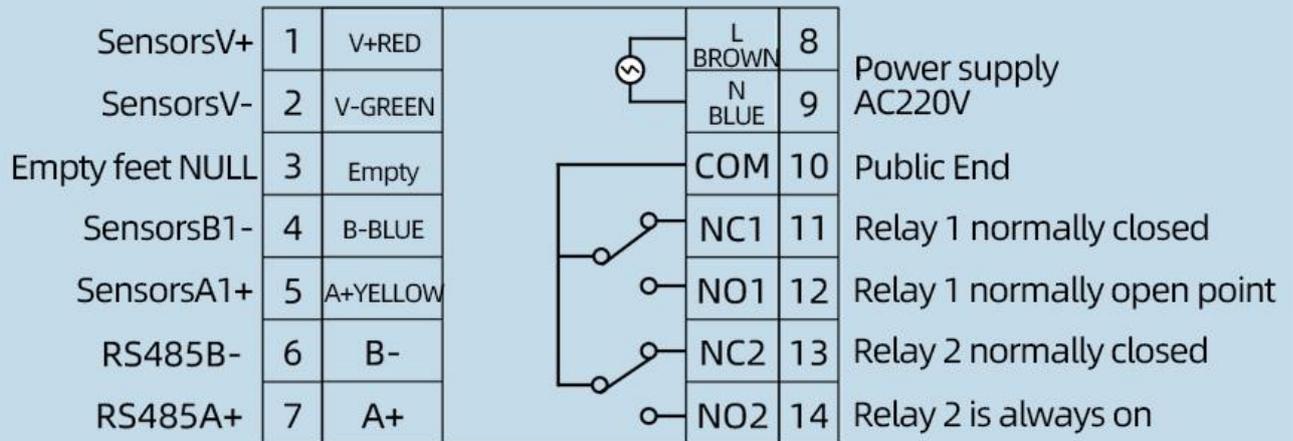

LEFT SENSOR WIRING

- (1)RED SENSORSV+
- (2)GREEN SENSORSV-
- (4)BLUE SENSORSB1-
- (5)YELLOW SENSORSA1+

Right Power AC220V connection

- (8)BROWN L BROWN
- (9)BLUE N BLUE

Wiring instructions


In the case of broken wires, wire the wires as shown in the figure. If the product itself has no leads, the core color is for reference.

How to use?

Daily real-time monitoring, applicable to a wide range of efficient detection, stable and reliable, applied to agriculture, forestry, greenhouse cultivation, breeding, pasture and other needs to measure soil temperature and humidity environment




Application solution

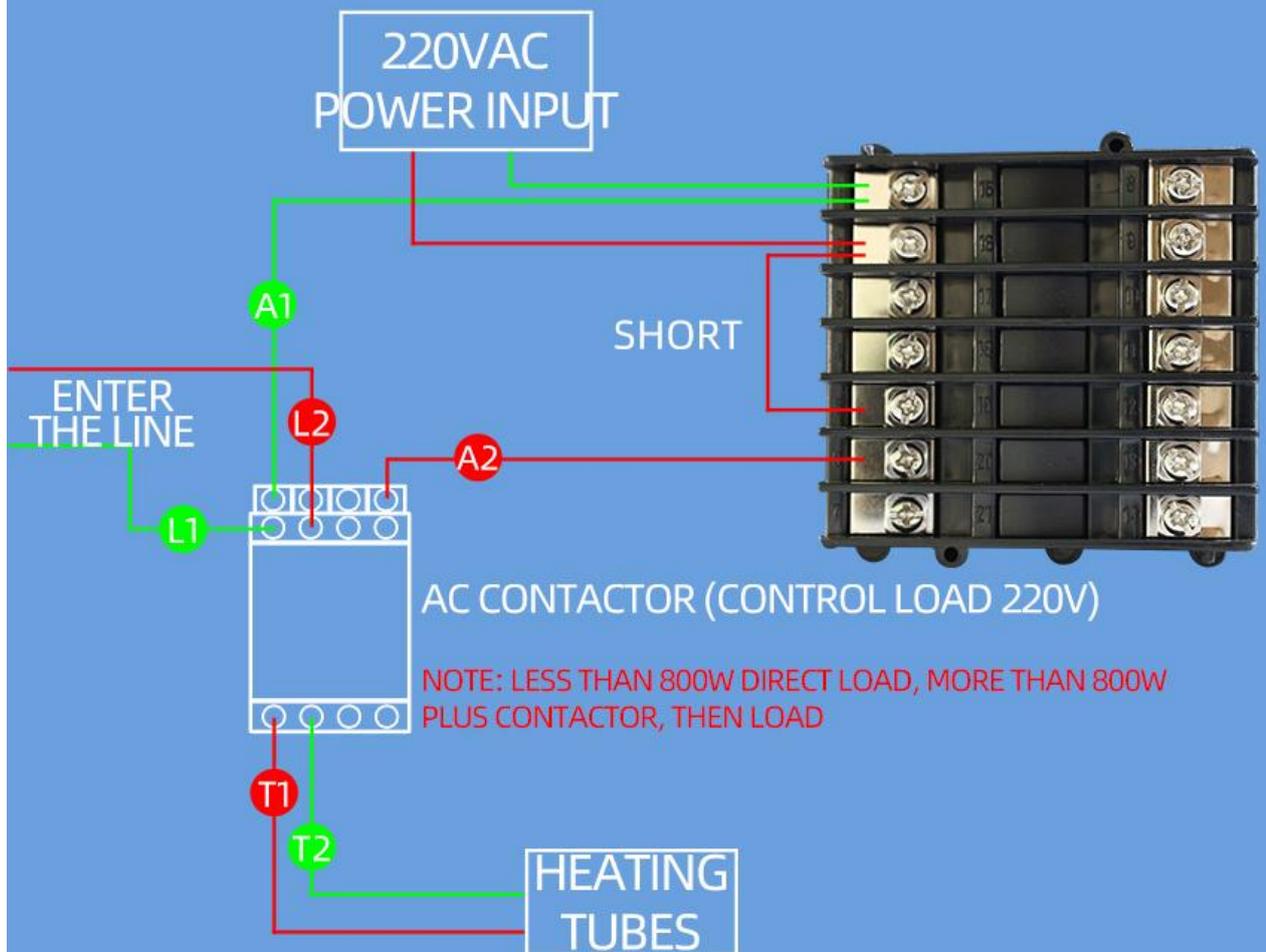

Control mode and process

Above threshold action, below threshold action, over/below threshold action

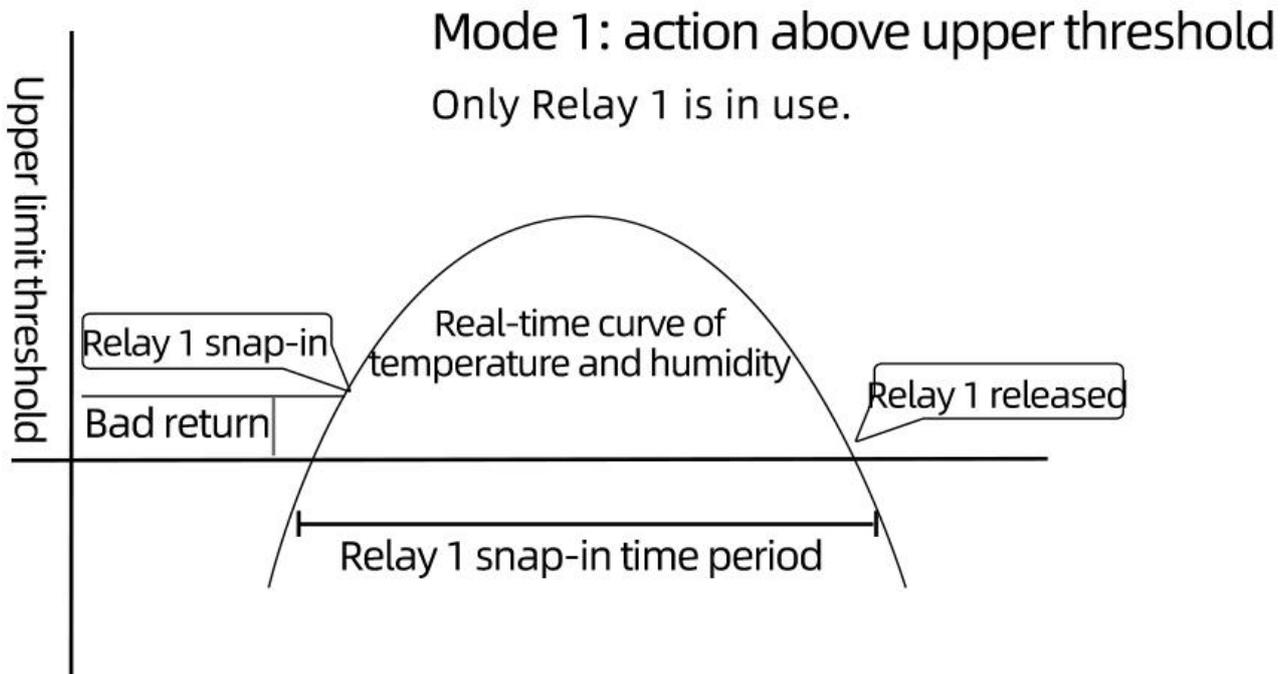


The opening and closing process of temperature and humidity control equipment

Suction conditions of relay 1: measured value $>$; Upper threshold return value

Relay 1 release action condition: measured value $<$; upper limit threshold-return difference value

※As shown above, when the measured value is above the upper limit threshold and the difference is added back, the relay 1 inside the controller closes and opens the device; when the measured value drops to the upper limit threshold and the difference is reduced, the relay 1 disconnects, turn off the device.

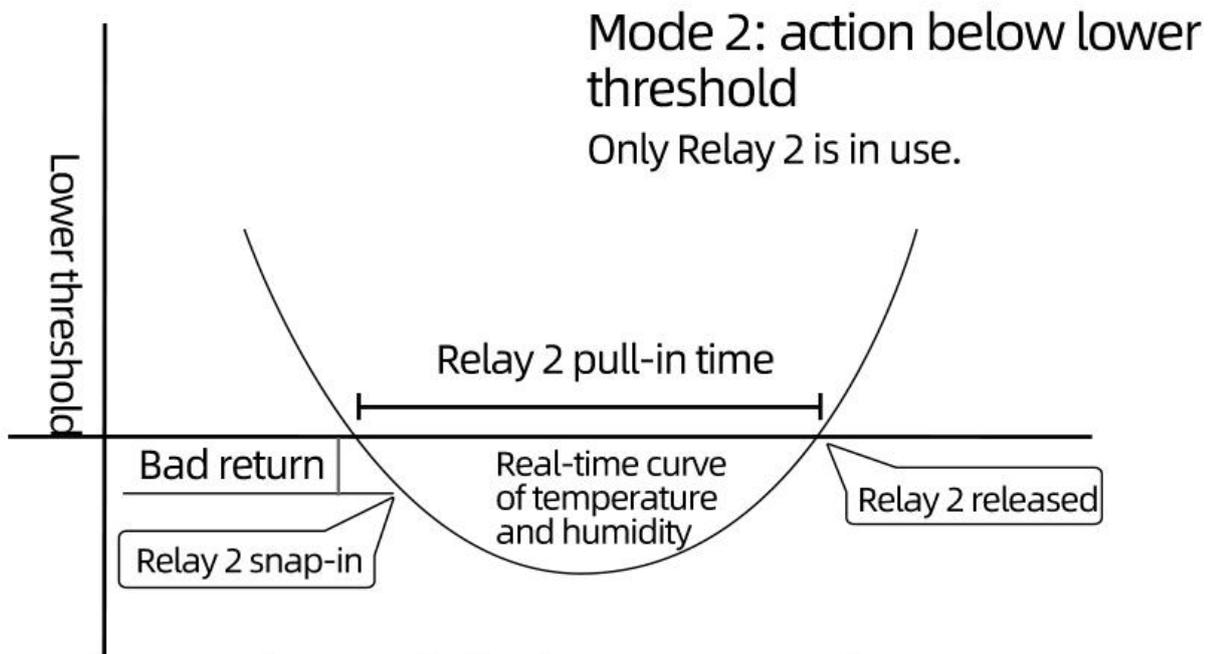

The opening and closing process of temperature and humidity control equipment


Relay 2 pull-in action condition: measured value & LT; lower limit value-return difference value

Release condition of relay 2: measured value > Lower threshold return value

※As shown above, relay 2 inside the controller closes the device when the measured value is below the lower threshold value minus the difference; relay 2 disconnects when the measured value rises to the lower threshold value plus the difference value, turn on the device.

Mode 3: action above/below threshold

Above the upper limit threshold relay 1 action, below the lower limit threshold, relay 2 action, generally used to control the positive and negative rotation of the motor equipment.

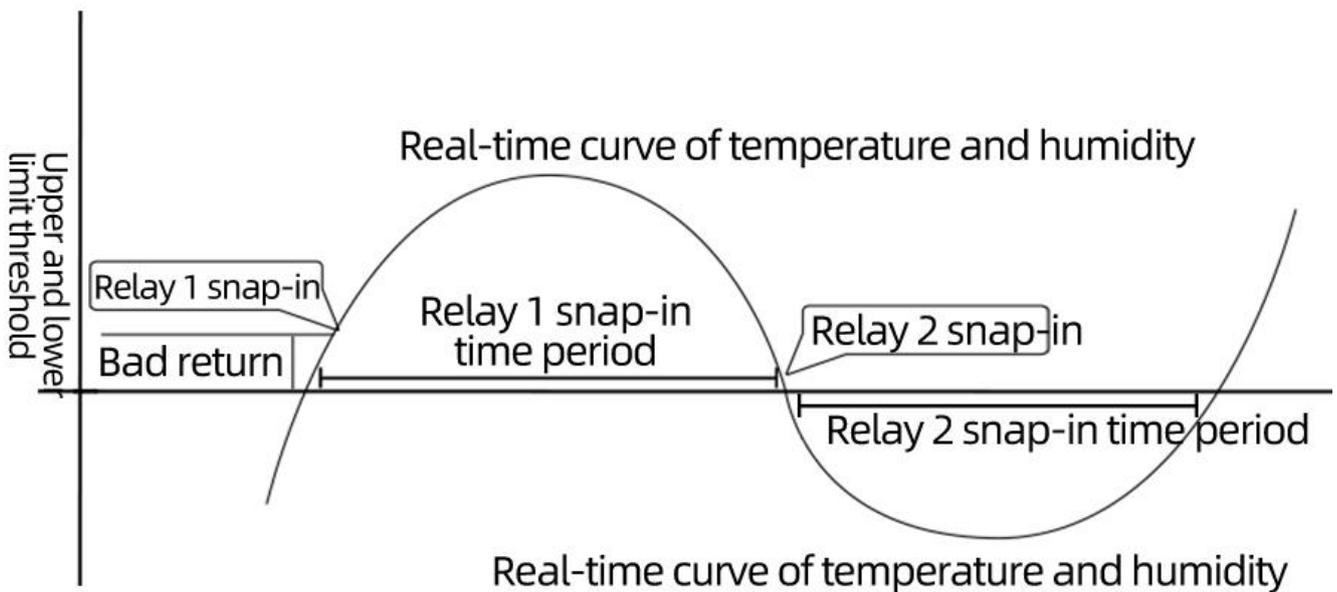

The opening and closing process of temperature and humidity control equipment

Conditions of relay 1 suction: measured value $>$ Upper threshold
return value

Relay 2 suction condition: measured value $<$ LT; lower limit threshold
-return difference value

※As shown above, when the measured value is higher than the upper limit value + the return difference value, the internal relay 1 of the controller closes, and the motor of the general control equipment is turned to start the equipment; after starting, when the value is lower than the lower limit value-the return difference value, then the Relay 2 absorbs, generally controls the equipment motor to reverse thus shuts down the equipment.

The application of intelligent controller

EXAMPLE: WHEN WATER OR TEMPERATURE EXCEEDS/FALLS BELOW A THRESHOLD DURING IRRIGATION, THE SENSOR TRANSMITS HUMIDITY AND TEMPERATURE DATA TO THE CONTROLLER, WHICH THEN CLOSES/OPENS THE IRRIGATION DEVICE ACCORDING TO A PRE-SET THRESHOLD, THE DATA CAN BE SYNCHRONIZED TO THE COMPUTER THROUGH THE RS485 COMMUNICATION PORT

Method of underground survey

INTELLIGENT SOIL MOISTURE
TEMPERATURE AND HUMIDITY CONTROLLER



Rapid measurement method

Select a suitable measuring site, avoid rocks, dig the topsoil according to the required depth of measurement, keep the original tightness of the lower soil, hold the sensor and insert it vertically into the soil, don't swing it from side to side when inserting, ensure close contact with the soil

INTELLIGENT SOIL MOISTURE TEMPERATURE AND HUMIDITY CONTROLLER



SYNC TO THE COMPUTER

Product List



Intelligent soil moisture controller (including power supply and sensor)



Warm Reminder card



Certificate

Communication Protocol

The product uses RS485 MODBUS-RTU standard protocol format, all operation or reply commands are hexadecimal data. The default device address is 1 when the device leaves the factory, and the module or NON-Recorder default baud rate is 9600,8,n,1 ,but data recorder default baud rate is 115200 .

1. Read data (function code 0x03)

Inquiry frame (hexadecimal), sending example: query 1 data of 1# device, the upper computer sends the command: 01 03 00 00 00 02 C4 0B .

Address	Function Code	Start Address	Data Length	Check Code
01	03	00 00	00 02	C4 0B

For the correct query frame, the device will respond with data: 01 03 04 00 7A 00 00 DB EA , response format:

Address	Function Code	Length	Data 1	Data 2	Check Code
01	03	04	00 79	00 7A	DB EA

Data description: The data in the command is hexadecimal, take data 1 as an example, 00 79 is converted to decimal value as 121, assuming the data magnification is 100, then the real value is

121/100=1.21, Others and so on.

2. Common data address table

Configuration Address	Register Address	Register Description	Data Type	Value Range
40001	00 00	soil Moisture	Read Only	0~65535
40002	00 01	soil temperature	Read Only	0~65535
40101	00 64	Model Code	Read/Write	0~65535
40102	00 65	total number of measuring points	read/write	1~20
40103	00 66	device address	read/write	1~249
40104	00 67	baud rate	read/write	0~6
40105	00 68	communication mode	read/write	1~4
40106	00 69	protocol type	read/write	1~10

3 Read and modify device address

(1) Read or query device address

If you don't know the current device address and there is only one device on the bus, you can query the device address through the command FA 03 00 66 00 01 71 9E .

Device Address	Function Code	Start Address	Data Length	Check Code
FA	03	00 66	00 01	71 9E

FA means 250 is the general address, when you don't know the address, you can use 250 to get the real device address, 00 66 is the device address register.

For the correct query command, the device will respond, for example, the response data is: 01 03 02 00 01 79 84, and its format parsing is shown in the following table:

Device Address	Function Code	Start Address	Model Code	Check Code
01	03	02	00 01	79 84

In the response data, the first byte 01 represents the real address of the current device.

(2) Change device address

For example, if the current device address is 1 and we want to change it to 02, the command is: 01 06 00 66 00 02 E8 14 .

Device Address	Function Code	Register Address	Target Address	Check Code
01	06	00 66	00 02	E8 14

After the change is successful, the device will return the information: 02 06 00 66 00 02 E8 27 , and its format analysis is shown in the following table:

Device Address	Function Code	Register Address	Target Address	Check Code
02	06	00 66	00 02	E8 27

In the response data, after the modification is successful, the first byte is the new device address. Generally, after the device address is changed, it will take effect immediately. At this time, the user needs to change the query command of his software accordingly. .

4 Read and modify baud rate

(1) Read baud rate

The default factory baud rate of the device is 9600. If you need to change it, you can change it according to the following table and the corresponding communication protocol. For example, to read the baud rate ID of the current device, the command is: 01 03 00 67 00 01 35 D5 , the format is parsed as

follows.

Device Address	Function Code	Start Address	Data Length	Check Code
01	03	00 67	00 01	35 D5

Read the baud rate code of the current device. Baud rate code: 1 is 2400; 2 is 4800; 3 is 9600; 4 is 19200; 5 is 38400; 6 is 115200.

For the correct query command, the device will respond, for example, the response data is: 01 03 02 00 03 F8 45, and its format analysis is shown in the following table:

Device Address	Function Code	Data Length	Baud Rate Code	Check Code
01	03	02	00 03	F8 45

According to the baud rate code, 03 is 9600, that is, the baud rate of the current device is 9600.

(2) Change the baud rate

For example, change the baud rate from 9600 to 38400, that is, change the code from 3 to 5, the command is: 01 06 00 67 00 05 F8 16 .

Device Address	Function Code	Register Address	Target Baud Rate	Check Code
01	06	00 67	00 05	F8 16

Change the baud rate from 9600 to 38400, that is, change the code from 3 to 5. The new baud rate will take effect immediately, and the device will lose response at this time, and the baud rate of the device needs to be checked accordingly Modified.

5 Read and modify correction value

(1) Read correction value

When there is an error between the data and the reference standard, we can reduce the display error by adjusting the correction value. The correction difference can be modified in a range of plus or minus 1000, that is, the value range is 0-1000 or 64535 -65535. For example, when the displayed value is too small by 100, we can correct it by adding 100. The command is: 01 03 00 6B 00 01 F5 D6 . In the command, 100 is hexadecimal 0x64 ;If you need to reduce it, you can set a negative value, such as -100, the corresponding hexadecimal value is FF 9C, the calculation method is $100-65535=65435$, and then converted to hexadecimal, it is 0x FF 9C. Device The correction value starts from 00 6B. We take the first parameter as an example to illustrate. When there are multiple parameters, the correction value is read and modified in the same way.

Device Address	Function Code	Start Address	Data Length	Check Code
01	03	00 6B	00 01	F5 D6

For the correct query command, the device will respond, for example, the response data is: 01 03 02 00 64 B9 AF, and its format parsing is shown in the following table:

Device Address	Function Code	Data Length	Correction Value	Check Code
01	03	02	00 64	B9 AF

In the response data, the first byte 01 represents the real address of the current device, and 00 6B is the first state correction value register. If the device has multiple parameters, other parameters operate in the same way as this The same, generally temperature and humidity have this parameter, and lighting generally does not have this parameter.

(2) Change the correction value

For example, if the current state is too small, we want to add 1 to its real value, and add 100 to the current value. The correction operation command is: 01 06 00 6B 00 64 F9 FD .

Device Address	Function Code	Register Address	Target Address	Check Code
01	06	00 6B	00 64	F9 FD

After the operation is successful, the device will return the information: 01 06 00 6B 00 64 F9 FD , after the successful change, the parameters will take effect immediately.

Disclaimer

This document provides all information about the product, does not grant any license to intellectual property, does not express or imply, and prohibits any other means of granting any intellectual property rights, such as the statement of sales terms and conditions of this product, other issues. No liability is assumed. Furthermore, our company makes no warranties, express or implied, regarding the sale and use of this product, including the suitability for the specific use of the product, the marketability or the infringement liability for any patent, copyright or other intellectual property rights, etc. Product specifications and product descriptions may be modified at any time without notice.

Contact Us

Company: Shanghai Sonbest Industrial Co., Ltd

Address: Building 8, No. 215 North east road, Baoshan District, Shanghai, China

Web: <http://www.sonbest.com>

Web: <http://www.sonbus.com>

SKYPE: soobuu

Email: sale@sonbest.com

Tel: 86-021-51083595 / 66862055 / 66862075 / 66861077